

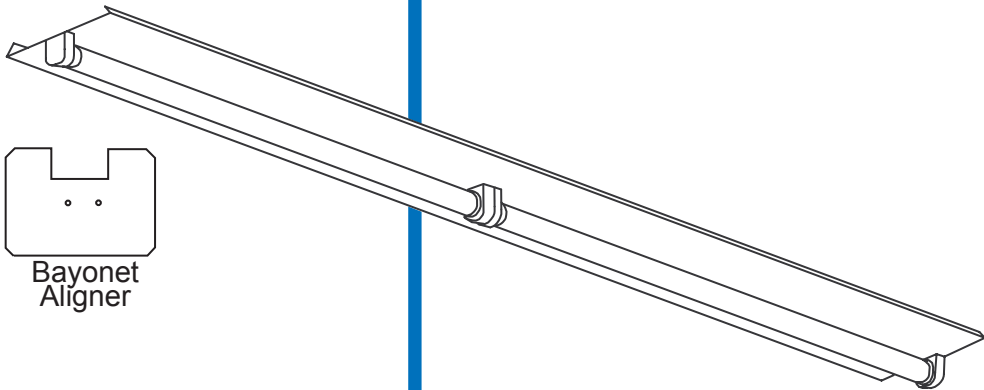


SERIES R212

6"X2', 6"X3', 6"X4', 6"X6' and 6"X8'
Strip Light Spring Mounted
Pre-Wired RetroFit Assembly

Bead Chain
Mounting
System



FEATURES:

- CONVERTS STANDARD WIDTH STRIP FIXTURES TO STATE OF THE ART ENERGY SAVING T8 TECHNOLOGY
- DESIGNED FOR USE WITH HIGH BALLAST FACTOR BALLASTS TO DRAMATICALLY REDUCE ENERGY CONSUMPTION AND MAINTAIN LIGHT LEVELS
- PATENTED BEAD CHAIN MOUNTING SYSTEM REDUCES INSTALLATION AND MAINTENANCE TIME
- BAYONET TYPE ALIGNING SYSTEM ENSURES STRAIGHT FIXTURE ROWS
- POST PAINTED HIGH REFLECTANCE POWDER COAT FINISH



UNION MADE IN THE USA.

ORDERING:

NOMINAL SIZE	LAMPS	CATALOG NUMBER
6"X 2'	1-FO17	R212-124T8
6"X 3'	1-FO25	R212-136T8
6"X 4'	1-FO32	R212-148T8
6"X 2'	2-FO17	R212-224T8
6"X 3'	2-FO25	R212-236T8
6"X 4'	2-FO32	R212-248T8
6"X 6'	2-FO25	R212-136-2T8
6"X 8'	2-FO32	R212-148-2T8
6"X 2'	3-FO17	R212-324T8
6"X 3'	3-FO25	R212-336T8
6"X 4'	3-FO32	R212-348T8
6"X 6'	4-FO25	R212-236-2T8
6"X 8'	4-FO32	R212-248-2T8
6"X 6'	6-FO25	R212-336-2T8
6"X 8'	6-FO32	R212-348-2T8

INSERT VOLTAGE AT END OF CATALOG NUMBER

NOTES:

1. FITS EXISTING FIXTURE WIDTHS UP TO 5-1/4 INCHES

MANUFACTURING
1715 KIBBY ROAD - MERCED - CALIFORNIA - 95340
(209) 723-9120 - FAX: (209) 723-9131

SALES OFFICE
14722 WICKS BLVD. - SAN LEANDRO - CALIFORNIA - 94577-6718
(510) 667-6950 - FAX: (510) 667-6959

INSTALLATION INSTRUCTIONS

TURN OFF POWER TO FIXTURE BEING RETROFITTED.

REMOVE EXISTING LAMPS.

REMOVE EXISTING BALLAST / WIRE WAY COVER(S).

CUT POWER LEADS TO EXISTING BALLAST.

REMOVE EXISTING SOCKET PLATES.

REMOVE EXISTING BALLAST (DISPOSE IN ACCORDANCE WITH LOCAL CODES).

"TEK" SCREW MOUNTING ANGLE TO TOP OF HOUSING, INDEXING OFF 7/8" KNOCK OUT, PULL 2 - 3 INCHES OF BEAD-CHAIN THROUGH KEY-HOLE SLOT IN MOUNTING ANGLE AND SECURE.

CONNECT BALLAST LEADS AND GROUND TO APPROPRIATE EXISTING CONNECTIONS THEREIN EXISTING HOUSING.

ONCE CONNECTION IS MADE PRESS R212 TIGHTLY AGAINST EXISTING HOUSING AND SECURE BY PULLING CHAIN THROUGH HOLE. ONCE HOUSING IS SNUG, SECURE CHAIN BY SLIDING INTO SLOT.

WHEN HOUSING IS SECURE COIL EXCESS BEAD-CHAIN INTO CAP AND PUSH ARROW CLIP INTO HOLE IN HOUSING.

TO REMOVE CAP PULL LIGHTLY AND DISENGAGE ARROW CLIP.

ALIGNMENT OF CONSECUTIVE RETROFIT ASSEMBLIES CAN BE ACCOMPLISHED BY COUPLING ENDS TOGETHER USING THE SUPPLIED BAYONET ALIGNER.

INSTALL LAMPS AND TURN ON POWER.

NOTE

All fixtures must be installed, wired and grounded in accordance with the National Electric Code and all other applicable codes.

!!! WARNING !!!

RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL PARTS MAY BE DAMAGED WHEN DRILLING OR USING "TEK" SCREWS FOR INSTALLATION OF MOUNTING HARDWARE. CHECK ENCLOSED WIRING AND COMPONENTS. USE CAUTION WHEN DRILLING "TEK" SCREWS INTO A BLIND AREA. TO PREVENT WIRING DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.

