

FEATURES:

- ONE PIECE COMPRESSION MOLDED ENCLOSED AND GASKETED HOUSING
- ONE WATERTIGHT HUB PROVIDED
- FIBERGLASS REINFORCED POLYESTER HOUSING
- DIFFUSER OF HIGH IMPACT ACRYLIC / DR MATERIAL
- POST PAINTED HIGH REFLECTANCE POWDER COAT FINISH ON STEEL REFLECTOR; AVAILABLE WITH SPECULAR REFLECTOR ADD ON
- ZERO OR MINUS 20 DEGREE BALLASTS AVAILABLE
- MOUNTING BRACKETS FURNISHED FOR EASY INSTALLATION
- AVAILABLE WITH TAMPER RESISTANT SCREWS
- NASF/ANSI STANDARD 2 (FOOD EQUIPMENT), NEMA 4X AND IP67 RATED

UNION MADE IN THE USA.

ORDERING:

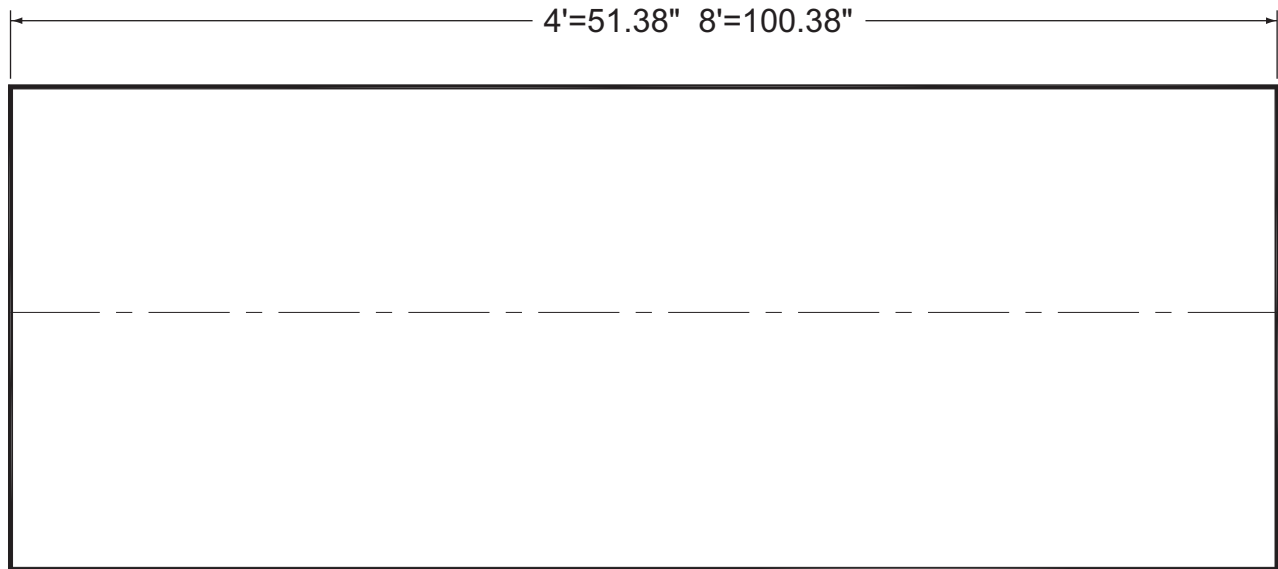
NOMINAL LENGTH	LAMPS	CATALOG NUMBER
4'	4-FO32	195-*-448T8
4'	6-FO32	195-*-648T8
4'	4-F54	195-*-448T5-HO
4'	6-F54	195-*-648T5-HO

* INSERT "R" FOR SYMMETRICAL SPECULAR REFLECTOR
INSERT VOLTAGE AT END OF CATALOG NUMBER

NOTES:

1. ALSO AVAILABLE IN T5 STANDARD OUTPUT
2. AVAILABLE WITH UL LISTED EMERGENCY BALLAST FOR ENCLOSED AND GASKETED FIXTURES.
3. FIXTURE LENGTHS ARE NON-STANDARD
4. OPTIONAL LENS TETHERS (2 EACH)

MANUFACTURING
1715 KIBBY ROAD - MERCED - CALIFORNIA - 95341
(209) 723-9120 - FAX: (209) 723-9131

BACK DETAIL**NOTE**

All fixtures must be installed,
wired and grounded in accordance
with the National Electric Code and all
other applicable codes.

!!! WARNING !!!

RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL
PARTS MAY BE DAMAGED WHEN DRILLING OR USING
"TEK" SCREWS FOR INSTALLATION OF MOUNTING
HARDWARE. CHECK ENCLOSED WIRING AND
COMPONENTS. USE CAUTION WHEN DRILLING "TEK"
SCREWS INTO A BLIND AREA. TO PREVENT WIRING
DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.

