
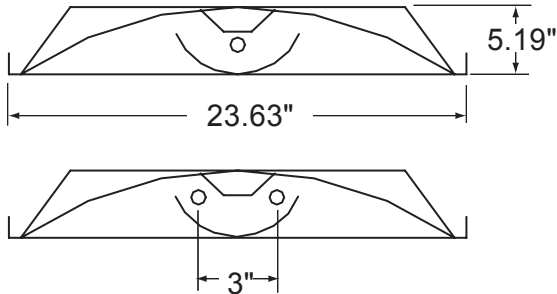


SERIES 355

2 x 2 and 2 x 4
Direct - Indirect
Lay-in Troffer

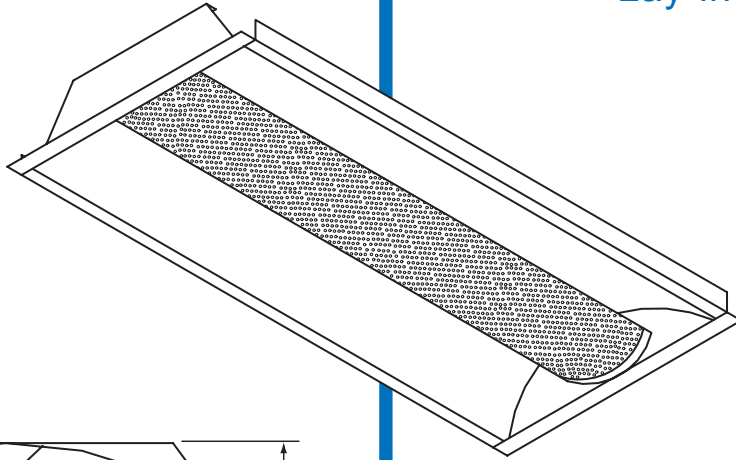

FEATURES:

- T5 TECHNOLOGY MAINTAINS A HIGHER PERCENT OF RATED LUMENS
- PERFORATED DIFFUSER ELIMINATES GLARE AND BALANCES THE BRIGHTNESS
- POST PAINTED SATIN WHITE FINISH PROVIDES A SOFTER LIGHT DISTRIBUTION
- REFLECTOR DESIGN IMPROVES OVERALL LUMINAIRE EFFICIENCY
- COMPUTER FRIENDLY ALTERNATIVE TO STANDARD RECESSED LIGHTING

TYPICAL APPLICATION:

- STANDARD 8' CEILING

UNION MADE IN THE USA.

ORDERING:

NOMINAL SIZE	LAMPS	CATALOG NUMBER
2' X 2'	1-FP24	355-PK-124T5-HO
2' X 2'	2-FP24	355-PK-224T5-HO
2' X 4'	1-FP54	355-PK-148T5-HO
2' X 4'	2-FP54	355-PK-248T5-HO

INSERT VOLTAGE AT END OF CATALOG NUMBER

NOTES:

1. AVAILABLE WITH STANDARD T5 LAMP AND BALLAST CONFIGURATION
2. AVAILABLE IN POWDERCOAT FINISH ONLY

MANUFACTURING
1715 KIBBY ROAD - MERCED - CALIFORNIA - 95340
(209) 723-9120 - FAX: (209) 723-9131


SALES OFFICE
14722 WICKS BLVD. - SAN LEANDRO - CALIFORNIA - 94577-6718
(510) 667-6950 - FAX: (510) 667-6959

BACK DETAIL



WIRE ACCESS
COVER PLATE

Back detail symbols

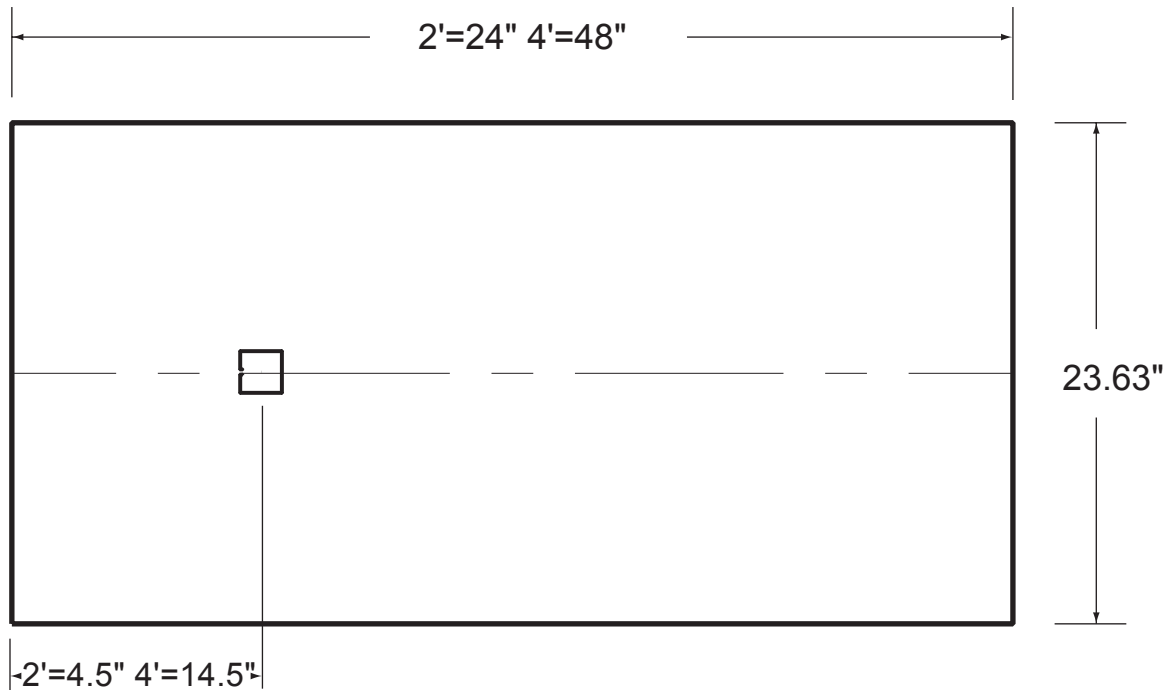

NOTE

All fixtures must be installed, wired and grounded in accordance with the National Electric Code and all other applicable codes.

!!! WARNING !!!

RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL PARTS MAY BE DAMAGED WHEN DRILLING OR USING "TEK" SCREWS FOR INSTALLATION OF MOUNTING HARDWARE. CHECK ENCLOSED WIRING AND COMPONENTS. USE CAUTION WHEN DRILLING "TEK" SCREWS INTO A BLIND AREA. TO PREVENT WIRING DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.

