# SERIES 359 2 x 2 and 2 x 4 Side Direct - Indirect Lay-in Troffer

# **FEATURES:**

PERFORATED DIFFUSER ELIMINATES
 GLARE AND BALANCES THE BRIGHTNESS

- 23.63" -

- POST PAINTED SATIN WHITE FINISH PROVIDES A SOFTER LIGHT DISTRIBUTION
- REFLECTOR DESIGN IMPROVES OVERALL LUMINAIRE EFFICIENCY
- COMPUTER FRIENDLY ALTERNATIVE TO STANDARD RECESSED LIGHTING

# **TYPICAL APPLICATION:**

STANDARD 8' CEILING

# **ORDERING:**

ONDERNING.		
NOMINAL SIZE	LAMPS	CATALOG NUMBER
2'X 2' 2'X 2' 2'X 4' 2'X 4'	1-F017 2-F017 1-F032 2-F032	
2'X 2' 2'X 2' 2'X 4' 2'X 4'	1-F24 2-F24 1-F54 2-F54	359-PK-224T5-HO 359-PK-448T5-HO 359-PK-248T5-HO 359-PK-448T5-HO
INSERT VOLTAGE AT END OF CATALOG NUMBER		

# **NOTES:**


- 1. AVAILABLE IN POWDERCOAT FINISH ONLY
- 2. AVAILABLE IN STANDARD T5 LAMP AND BALLAST CONFIGURATIONS


MANUFACTURING 1715 KIBBY ROAD - MERCED - CALIFORNIA - 95341 (209) 723-9120 - FAX: (209) 723-9131



# SERIES 359

## **BACK DETAIL**



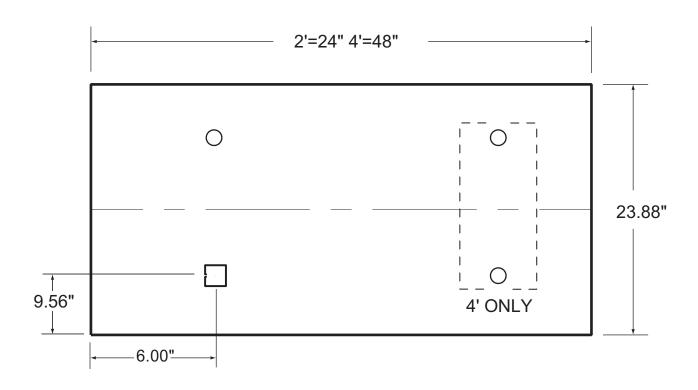

### **NOTE**

All fixtures must be installed, wired and grounded in accordance with the National Electric Code and all other applicable codes.

### !!! WARNING !!!

RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL PARTS MAY BE DAMAGED WHEN DRILLING OR USING "TEK" SCREWS FOR INSTALLATION OF MOUNTING HARDWARE. CHECK ENCLOSED WIRING AND COMPONENTS. USE CAUTION WHEN DRILLING "TEK" SCREWS INTO A BLIND AREA. TO PREVENT WIRING DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.

