



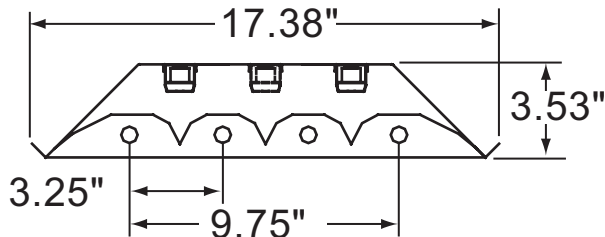

SERIES 551

T5 High Efficiency
High/Low Bay
Industrial Fixture

optional motion
sensor

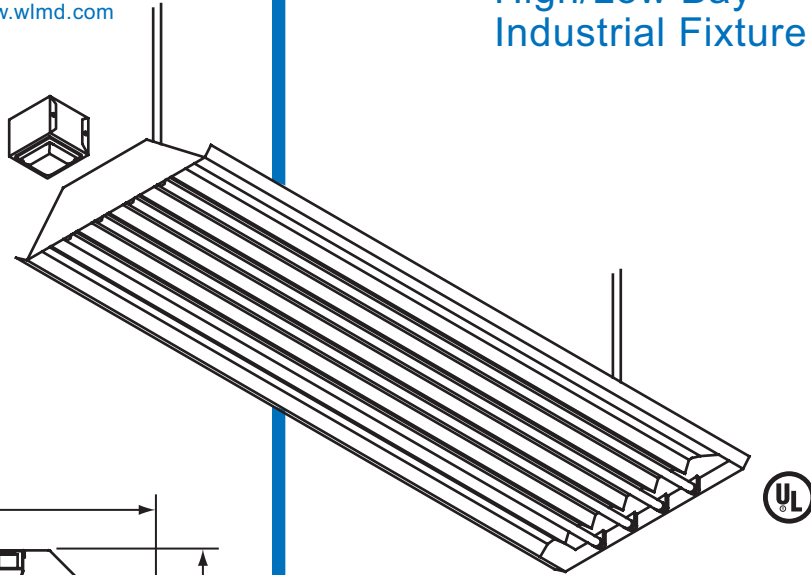

FEATURES:

- DESIGNED TO REPLACE HID FIXTURES
- AVAILABLE WITH (1) 4 LAMP BALLAST OR (2) 2 LAMP BALLASTS
- FIXTURE HOUSING POST PAINTED IN A HIGH REFLECTANCE POWDER COAT FINISH
- T5 HO LAMP TECHNOLOGY ELIMINATES RESTRIKE DELAY AND MAINTAINS A HIGHER PERCENT OF RATED LUMENS
- PROVIDES 82 CRI, OPERATES COOLER AND USES SIGNIFICANTLY LESS ENERGY THAN HID'S
- REFLECTOR DESIGN PROVIDES MAXIMUM SYSTEM PERFORMANCE
- END MOUNTED EXTERNAL SENSOR
- HIGH REFLECTANCE SPECULAR REFLECTOR STANDARD
- POWDER COAT HIGH REFLECTANCE REFLECTOR OPTIONAL

series 551.ai
040427

UNION MADE IN THE USA.

ORDERING:

NOMINAL SIZE	LAMPS	CATALOG NUMBER
-----------------	-------	-------------------

17"X 48"	4-FP54	551-SR-448T5-HO
----------	--------	-----------------

NOTE: (1) FOUR LAMP BALLAST STANDARD

INSERT VOLTAGE AT END OF CATALOG NUMBER


NOTES:

1. SPECIFY MOUNTING REQUIREMENTS
2. SEE OPTIONAL MOUNTING SYSTEMS ON BACK DETAIL
3. "SR" SIGNIFIES SPECULAR REFLECTOR
"PK" SIGNIFIES POWDER COAT REFLECTOR
4. OPTIONAL FACTORY INSTALLED MOTION SENSOR
5. OPTIONAL DOOR FRAME WITH LENS OR WIRE GUARD

MANUFACTURING
1715 KIBBY ROAD - MERCED - CALIFORNIA - 95340
(209) 723-9120 - FAX: (209) 723-9131

SALES OFFICE
14722 WICKS BLVD. - SAN LEANDRO - CALIFORNIA - 94577-6718
(510) 667-6950 - FAX: (510) 667-6959


PENDANT AND DOTTIE HANGER MOUNTING INSTRUCTIONS

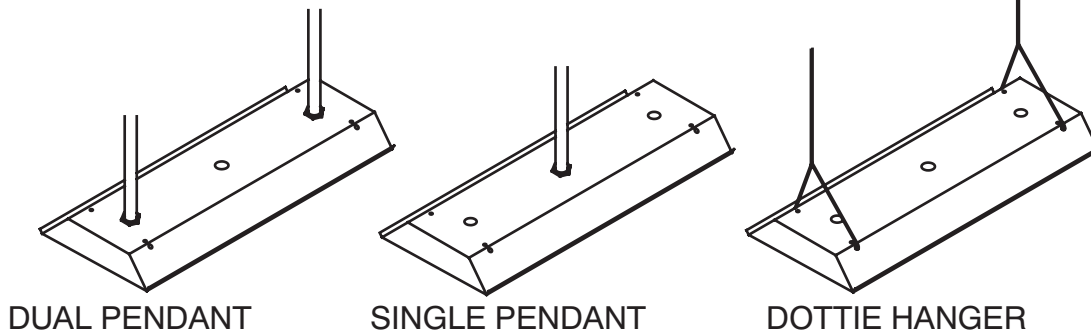

!!! WARNING !!!
RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL PARTS MAY BE DAMAGED WHEN DRILLING OR USING "TEK" SCREWS FOR INSTALLATION OF MOUNTING HARDWARE. CHECK ENCLOSED WIRING AND COMPONENTS. USE CAUTION WHEN DRILLING "TEK" SCREWS INTO A BLIND AREA. TO PREVENT WIRING DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.


NOTE
All fixtures must be installed, wired and grounded in accordance with the National Electric Code and all other applicable codes.

NOTE
NEVER hang or mount fixture from wire access plate. Always use industry standard mounting systems.

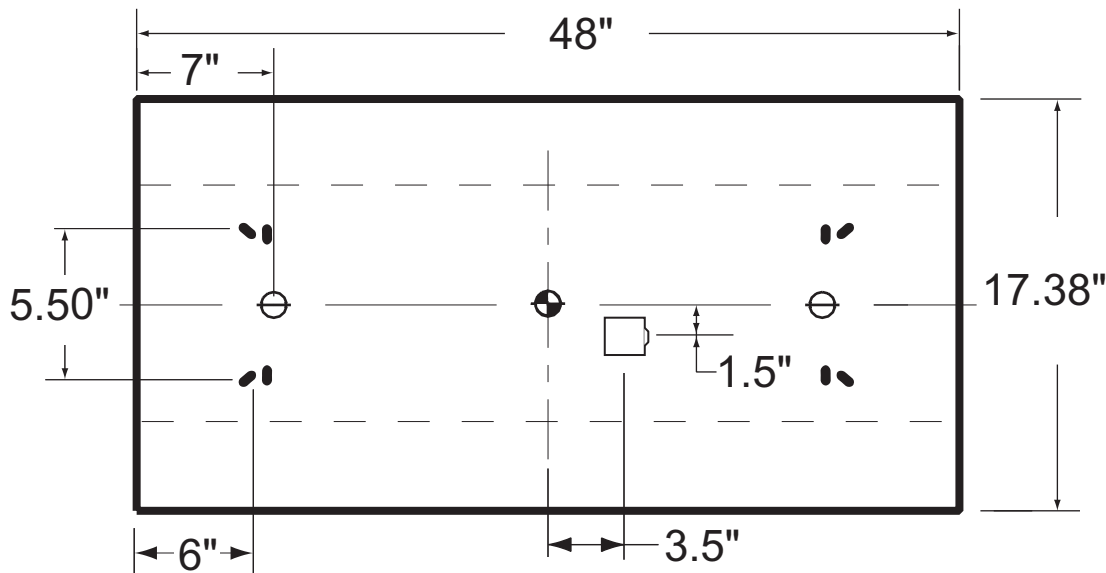

 DOTTIE SLOT

 7/8" K.O.

 11/16" K.O.

 WIRE ACCESS COVER PLATE

Back detail symbols

DUAL PENDANT MOUNTING - Remove two end 11/16" K.O.'s install pendants and secure using fasteners provided with pendant.

SINGLE PENDANT MOUNTING - Remove center 7/8" K.O.'s install pendants and secure using fasteners provided with pendant.

DOTTIE HANGER MOUNTING - Spread DOTTIE HANGER to approximately 5.5" insert hanger into diagonal slot with "hook" facing towards center. Repeat for other side. Connect DOTTIE HANGER to chain or other suspension system from top most bend.

