
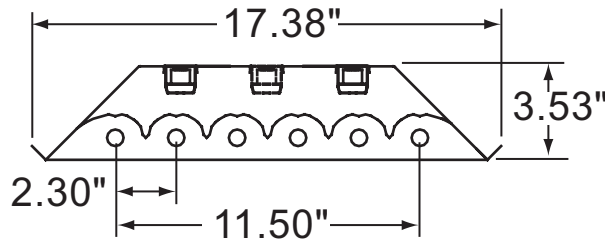


# SERIES 557

T5 High Efficiency  
High/Low Bay  
Industrial Fixture

optional motion  
sensor

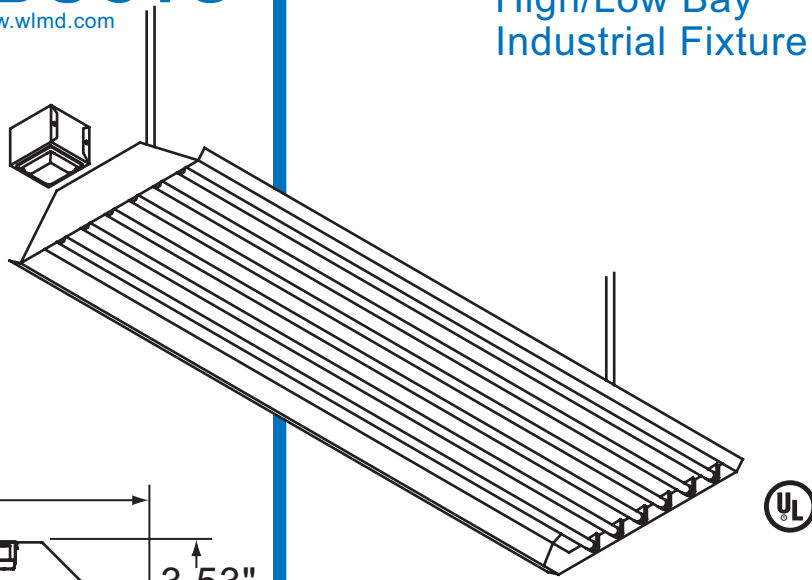

## FEATURES:

- DESIGNED TO REPLACE HID FIXTURES
- FIXTURE HOUSING POST PAINTED IN A HIGH REFLECTANCE POWDER COAT FINISH
- T5 HO LAMP TECHNOLOGY ELIMINATES RESTRIKE DELAY AND MAINTAINS A HIGHER PERCENT OF RATED LUMENS
- PROVIDES 82 CRI, OPERATES COOLER AND USES SIGNIFICANTLY LESS ENERGY THAN HID'S
- REFLECTOR DESIGN PROVIDES MAXIMUM SYSTEM PERFORMANCE
- END MOUNTED EXTERNAL SENSOR
- HIGH REFLECTANCE SPECULAR REFLECTOR STANDARD
- POWDER COAT HIGH REFLECTANCE REFLECTOR OPTIONAL

UNION MADE IN THE USA.

## ORDERING:

NOMINAL SIZE	LAMPS	CATALOG NUMBER
17"X 48"	6-FP54	557-SR-648T5-HO

INSERT VOLTAGE AT END OF CATALOG NUMBER


## NOTES:

1. SPECIFY MOUNTING REQUIREMENTS
2. SEE OPTIONAL MOUNTING SYSTEMS ON BACK DETAIL
3. "SR" SIGNIFIES SPECULAR REFLECTOR  
"PK" SIGNIFIES POWDER COAT REFLECTOR
4. OPTIONAL FACTORY INSTALLED MOTION SENSOR
5. OPTIONAL DOOR FRAME WITH LENS OR WIRE GUARD

MANUFACTURING  
1715 KIBBY ROAD - MERCED - CALIFORNIA - 95340  
(209) 723-9120 - FAX: (209) 723-9131

SALES OFFICE  
14722 WICKS BLVD. - SAN LEANDRO - CALIFORNIA - 94577-6718  
(510) 667-6950 - FAX: (510) 667-6959


## PENDANT AND DOTTIE HANGER MOUNTING INSTRUCTIONS

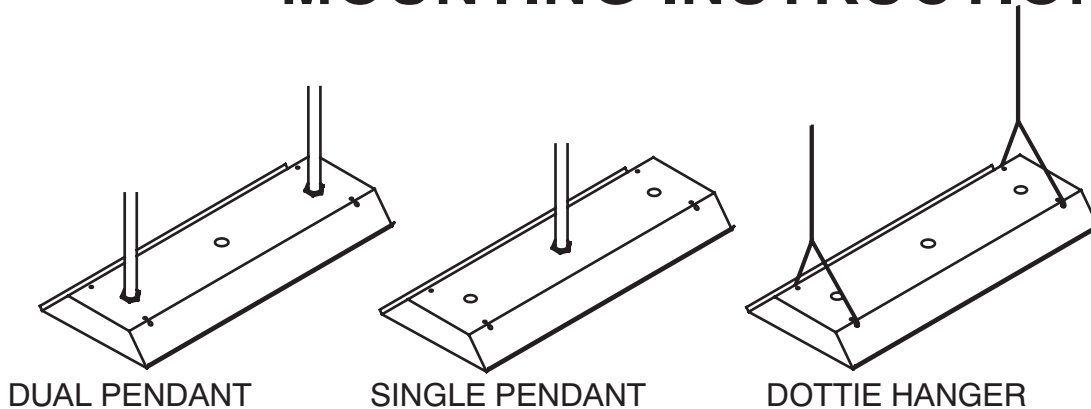


**!!! WARNING !!!**  
RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL PARTS MAY BE DAMAGED WHEN DRILLING OR USING "TEK" SCREWS FOR INSTALLATION OF MOUNTING HARDWARE. CHECK ENCLOSED WIRING AND COMPONENTS. USE CAUTION WHEN DRILLING "TEK" SCREWS INTO A BLIND AREA. TO PREVENT WIRING DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.


**NOTE**  
All fixtures must be installed, wired and grounded in accordance with the National Electric Code and all other applicable codes.

**NOTE**  
NEVER hang or mount fixture from wire access plate. Always use industry standard mounting systems.

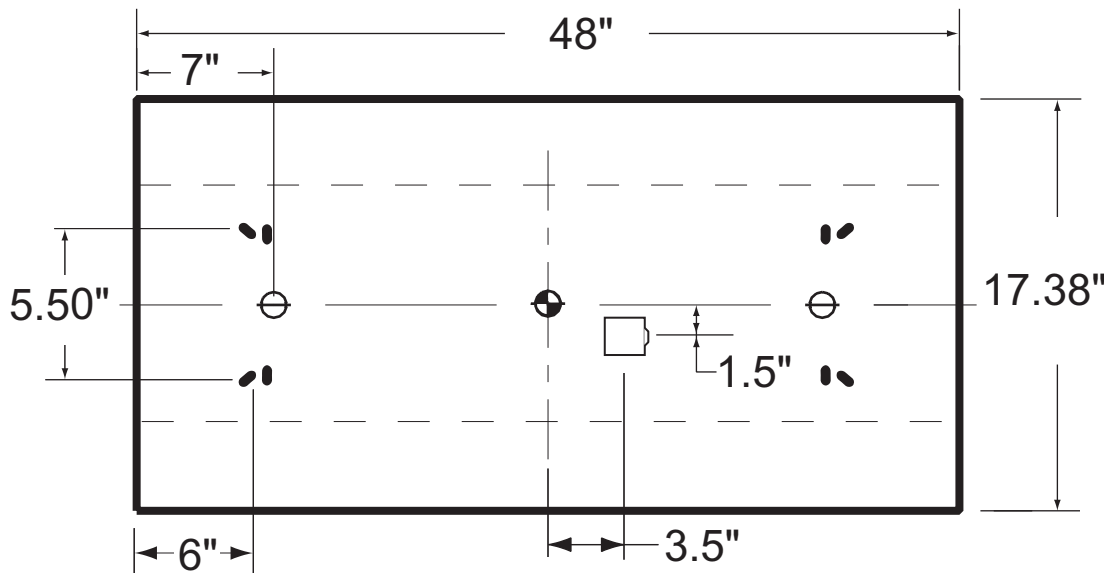

 DOTTIE SLOT

 7/8" K.O.

 11/16" K.O.

 WIRE ACCESS COVER PLATE

Back detail symbols

**DUAL PENDANT MOUNTING** - Remove two end 11/16" K.O.'s install pendants and secure using fasteners provided with pendant.

**SINGLE PENDANT MOUNTING** - Remove center 7/8" K.O.'s install pendants and secure using fasteners provided with pendant.

**DOTTIE HANGER MOUNTING** - Spread DOTTIE HANGER to approximately 5.5" insert hanger into diagonal slot with "hook" facing towards center. Repeat for other side. Connect DOTTIE HANGER to chain or other suspension system from top most bend.

