

SNAP-IN SOCKET PLATE INSTALLATION AND REMOVAL INSTRUCTIONS

TO INSTALL SOCKET PLATE:

ALIGN ONE SIDE OF TABS (A) WITH SLOT AS SHOWN IN FIGURE 2. PUSH INTO SLOT UNTIL TAB LOCKS SOCKET PLATE INTO POSITION. REPEAT FOR OTHER SIDE OF SOCKET PLATE. TEST BY FIRMLY PULLING SOCKET PLATE UP-WARD.

REINSTALL REFLECTORS.

TO REMOVE SOCKET PLATE:

REMOVE REFLECTOR BY DISENGAGING FROM LOCKING TABS, AND SET OFF TO THE SIDE.

USE A FLAT BLADE SCREWDRIVER TO GENTLY DISENGAGE TAB LOCKING SOCKET PLATE INTO PLACE (SEE FIGURE 1.) WHILE TAB IS DISENGAGED, FIRMLY PULL SOCKET PLATE UP-WARD FROM SLOT (A). TAKE CARE NOT TO PULL TO FAR AS OTHER SIDE MAY BECOME DISTORTED AND DIFFICULT TO REINSTALL. REPEAT FOR OTHER SIDE OF SOCKET PLATE.

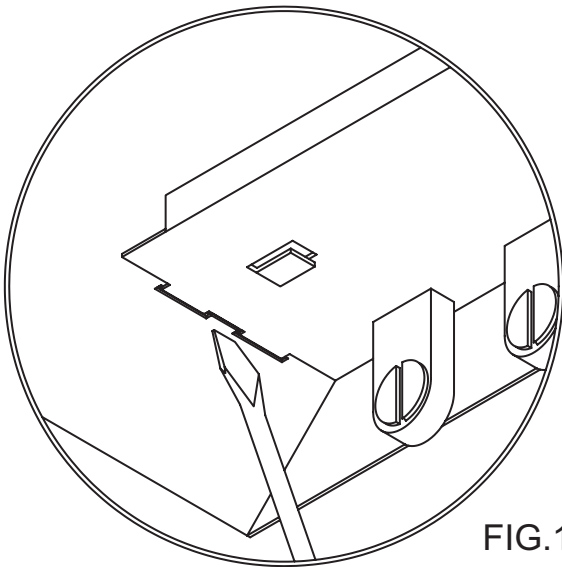


FIG.1

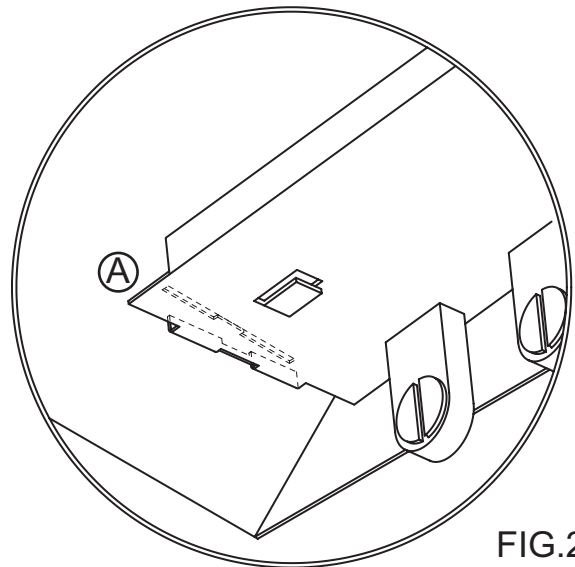


FIG.2

NOTE

All fixtures must be installed, wired and grounded in accordance with the National Electric Code and all other applicable codes.

!!! WARNING !!!

RISK OF FIRE OR ELECTRICAL SHOCK. ELECTRICAL PARTS MAY BE DAMAGED WHEN DRILLING OR USING "TEK" SCREWS FOR INSTALLATION OF MOUNTING HARDWARE. CHECK ENCLOSED WIRING AND COMPONENTS. USE CAUTION WHEN DRILLING "TEK" SCREWS INTO A BLIND AREA. TO PREVENT WIRING DAMAGE DO NOT EXPOSE WIRING TO SHARP EDGES.

